


Walraven HK

(L0560)

fixing to concrete, brick

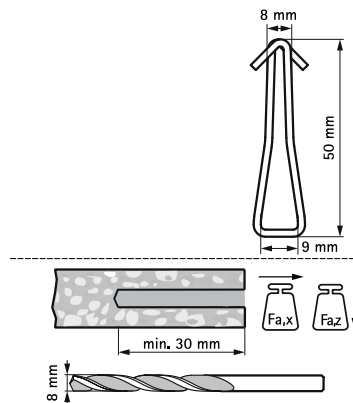

Features & benefits

- for fixing of steel wire, suspension band or chain in concrete and solid stone
- for suspension of static loads such as air ducts, lowered ceilings, etc. to concrete
- also suitable for outside use
- better fire resistance than plastic plugs
- tested by CSTB, test report EPOD/06-05 (HK)
- max. allowed load (Fa) in concrete (350 kg/m³) with safety factor 1:4, drill hole Ø 8 mm and hammer in HK wire anchor
- material: stainless steel A4 (1.4401/ AISI 316)

Product Number	Total Width	Total Height	Total Length	Total Depth
Reference letter	W	H	L	DtT
Unit description	(mm)	(mm)	(mm)	(mm)
61073134	14	5	50	50
61073224	14	9	50	50