


## Walraven VibraTek® MR-L 1000/M8 Rubber Levelling Mount

(L20518)

rubber mount with M8 connection for equipment isolation and levelling

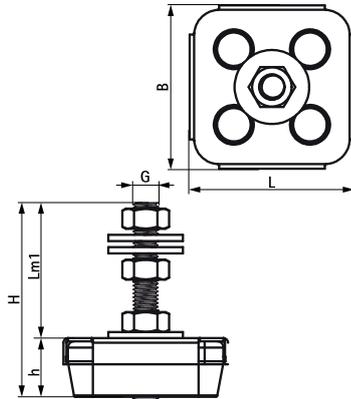

### Features & benefits

- recommended for machinery with working speeds above 2500 rpm, providing a degree of vibration insulation from 75% to 80%
- simple to install and does not need to be fixed to the supporting structure
- rubber isolator with DIN 934 nuts and DIN 9012 washers included in delivery for mounting and levelling equipment
- metal and rubber parts can be separated for recycling
- hardness 45 Shore A
- Working temperature range -20 °C till 90 °C

Product Number	Thread Size	Total Width x Total Height x Total Depth	Thread Length	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
<i>Reference letter</i>	<i>TS</i>	<i>W x H x Dt</i>	<i>TL</i>			<i>4</i>
<i>Unit description</i>		<i>(mm) x (mm) x (mm)</i>	<i>(mm)</i>	<i>(N)</i>	<i>(N)</i>	<i>(mm)</i>
2800101000	M8	50 x 70 x 50	44	100	800	4