


Walraven VibraTek® SA-3 Silent Absorber

(L20554)

silent rubber absorber for isolating metal to metal contact

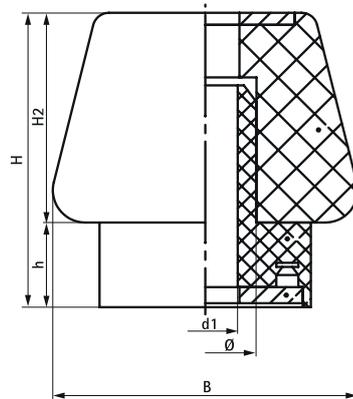

Features & benefits

- formed of two rubber parts which fit into each other, making it suitable for various fixing plate thicknesses
- ideal isolation of HVAC equipment
- for use with M8 threaded rods
- a versatile viscoelastic two-piece rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
- simple installation
- prevents transmission of vibration and noise
- working temperature range -20 °C till 90 °C

Product Number	Total Width x Total Height x Height Total Depth	Height 2	Connection Hole	Diameter	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection	
<i>Reference letter</i>	<i>W x H x DtT</i>	<i>h</i>	<i>h 2</i>	<i>CH</i>	<i>d</i>		<i>7</i>	
<i>Unit description</i>	<i>(mm) x (mm) x (mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(N)</i>	<i>(N)</i>	<i>(mm)</i>	
2801100300	37.50 x 36.50 x 37.50	10.50	26	8	12.50 - 37.50	5	200	7
2801100450	37.50 x 36.50 x 37.50	10.50	26	8	12.50 - 37.50	10	400	7