


Walraven Yeti® 335 Walkway Extension

(I1010)

prefabbed Walkway Extension Set for Rooftop Installations

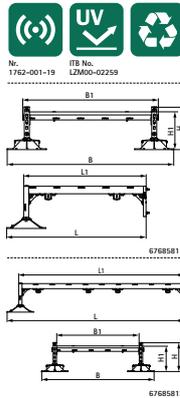

Features & benefits

- extension set for installation of walkways on flat and low pitched roofs
- with non-slip anti-vibration mat (at PVC roofs a separating layer must be installed to protect against plasticizer migration - see Walraven Walraven Yeti® Triplex Separation Layer)
- predefined load capacity: calculation not necessary.
- pre-assembled ready-to-use set for quick installation
- adjustable in height from 23 mm to 33 mm (pre-assembled to 33 mm height)
- mouldings made of WPC, a composite of recycled plastic and wood fibre
- resistant to UV and chemical influences
- product is part of the Walraven UltraProtect® 1000 system
- rail system construction: surface protection: stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- grids / steps: surface protection: hot dip galvanized
- noise reduction according to DIN EN ISO 10140-1 and DIN EN ISO 10140-3 up to 31 dB(A)
- UV-resistance according to EN ISO 16474-3:2014-02 - certified by ITB
- designs according to EN 14122
- In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation



Product Number	Total Width x Total Height x Total Length	Height 2	Maximum Allowed Load Faz
<i>Reference letter</i>	<i>W x H x L</i>	<i>h 2</i>	<i>Fa,z</i>
<i>Unit description</i>	<i>(mm) x (mm) x (mm)</i>	<i>(mm)</i>	<i>(N)</i>
67685811	1362 x 348 x 1140	300	2000
67685813	1361 x 348 x 2138	300	2000